Spectra-Zip Slit Zip Planar Cable

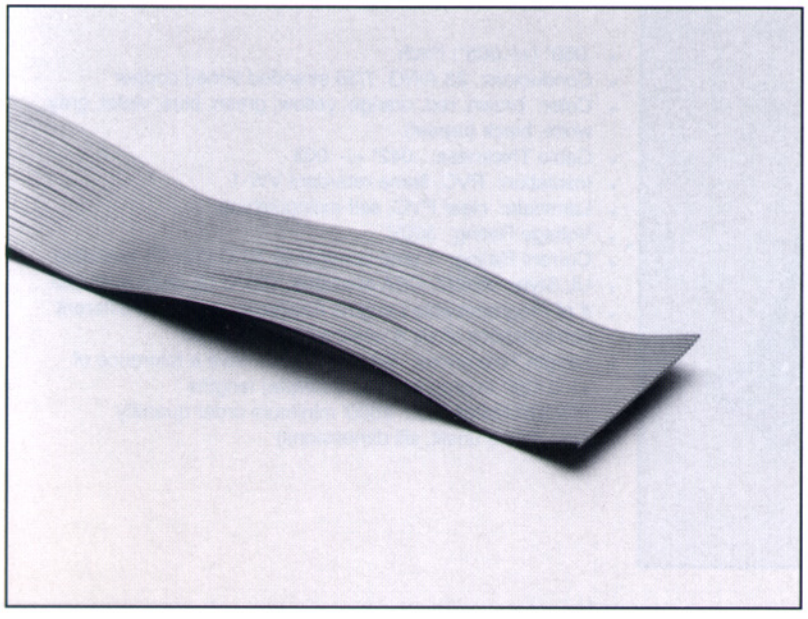

Characteristics

- .050" (+/- .002") Pitch
- Conductors: 28 AWG, 7/36 strand tinned copper
- Color: gray (one edge red)
- .050" Pitch Cable Thickness: .035" +/- .003"
- Insulation: PVC, flame retardant VW-1
- Voltage Rating: 300V
- Current Rating: 1 amp nominal@ 10°C
- Temperature Rating: -20°C to 105°C (-4°F to 221°F)
- UL Style: #2651, CSA available
- # of Programmable Lengths Available; up to five different combinations of slit & unslit within one cable
- Length Tolerances: .125" on slit & unslit lengths
- Minimum Slit Length: 0.75"
- Minimum Unslit Length: 0.75"
- Other Capabilities:
  .025" center cable, slit every two conductors
  .050" center cable, slit every two conductors
  other gauges and strands available
  Fixed: 1000' minimum order quantity
  3/4" unslit, 3/4 slit, repeat 3/4" unslit, 1 1/2" slit, repeat
  1" unslit, 1 3/4" slit, repeat 1 1/2" unslit, 4" slit, repeat
  PROGRAMMABLE: 5000' minimum order quantity
  (You define unslit, slit dimensions)

Ordering Information:

Overall put-up length: _____ Measure in: feet ☐ meters ☐

Slit: Every conductor ☐ AWG: _____ # of conductors: _____
Every two conductors ☐ Strand: _____
Spacing: _____

Slit length measure in: inches ☐ mm ☐

Indicate each unslit and slit length in spaces below.
Write in "repeat", if appropriate.

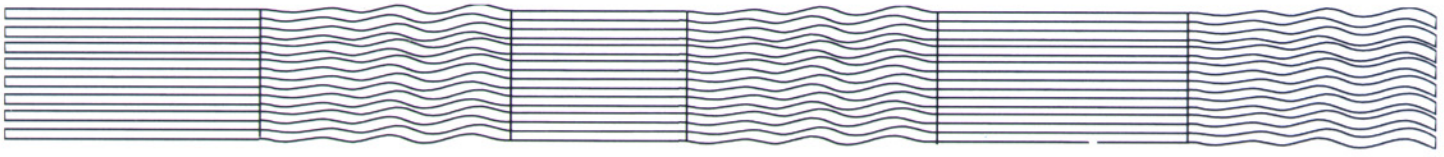

Unslit | Slit | Unslit | Slit | Unslit | Slit

Factory Part Number (will be assigned)

Date _____

This request for pricing is made by:

Name _____

Title _____

Company _____

Address _____

City _____ State _____ Zip _____

Phone No. (_____) _____

Fax No. (_____) _____

Comments: _____

Copy & Fax to: Cable Marketing Manager

Amphenol
SPECTRA-STRIP

Fax: (203) 281-5872
Phone: (203) 281-3200
(800) 846-6400